

GOUPIL G4-06

BOX VAN

100% ELECTRIC
ZERO EMISSIONS
ROAD HOMOLOGATED





OVERVIEW

The Goupil G4 is an all electric, zero emission light commercial utility vehicle. Road homologated to N1, the G4 is an ideal solution for a multitude of road applications both, public and private. The G4 has an impressive payload of up to 1200kg on the lithium Ion version.

ENVIRONMENTALLY FRIENDLY

100% Electric, Zero Emissions compliant for Low and Ultra Low Emission Zone within towns and cities. Silent operation enables night-time and early morning use.

ROAD LEGAL

The Goupil G4's are homologated to N1 and can be road registered (zero-rated) for use on public highways.

PERFORMANCE

The Curtis 48 volt controller gives the G4 a top speed of up to 31mph and handles gradients up to 18% laden and 30% unladen.

FLEXIBLE

Over 12 standard body options and with the ability to specify left hand or right hand drive, lead acid or lithium ion batteries, gives great versatility when configuring a G4 to match specific applications. In addition to the vehicles robust and versatile structure means the chassis can support customised equipment, ie refrigerated body, demountable street cleansing and gritting equipment.

ROBUST

The robust chassis is constructed from S345 steel, cataphoresis coated, robot welded and powder coated.

WARRANTY

Truck: 2 years parts and labour warranty

Battery

Lead Acid: 3 years parts and labour warranty
Lithium Ion: 5 years parts and labour warranty



Lead Acid / Lithium 100% Electric Zero-Emissions



N1 Type Approval



Range 50-101 miles



Left hand / Right hand drive



Payload up to 1200kg



G4-01 CHASSIS CAB



G4-02 PICK-UP



G4-03 PICK-UP CAGE BODY



G4-04PICK-UP CAGE TIPPER



G4-05PICK-UP PVC COVER



G4-06 VAN BODY



G4-07COMBINED PICK-UP WITH
200L PRESSURE WASHER



G4-08COMBINED PICK-UP WITH TOOLBOX



G4-09
COMBINED PICK-UP CAGE BODY
WITH LEAF COLLECTOR



G4-10PICK-UP WITH 500L PRESSURE WASHER



G4-11 HIGH TIP WASTE BODY




BOX VAN

- 3.0m³ van body
- Aluminium frame, dry freight panels with anti-slip floor
- Automatic LED light inside van bod
- Lockable shutter doors options to nearside, offside and rear

355 STEEL CHASSIS

 Cataphoresis coated, robot welded, powder coating including gap sealing

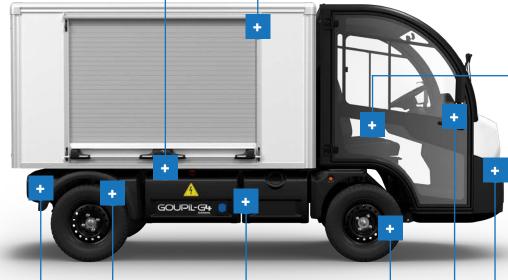

CENTRAL LOCKING

TOW HITCH

Tow hitch and trailer socket

BATTERY

- 100% Electric
- · Zero Emission
- Lead Acid or Lithium

BRAKING

- Electronic regenerative braking Dual circuit hydraulic brake system with
- a braking compensator controlled by the load
- Front: disk brakes
- Rear: drum brakes

FULL ROAD LIGHTING

- · In accordance with N1
- Headlights
- · Side lights
- · Rear and brake light
- Indicators
- Hazard warning lights
- · Reverse light
- · Rear fog light
- · LED running lights

SUSPENSION

- Front-wheels: McPherson with helical springs and hydraulic shock absorber
- Rear-wheels: leaf-spring with hydraulic shock absorber




HIGH-DEFINITION LCD COLOUR DISPLAY

- High-definition LCD colour display including
- Battery discharge indicator
- · Digital speedometer
- Odometer
- · Low level warning lights
- Dash mounted lamp to indicate when park brake is applied

DIMENSIONS AND PERFORMANCE

BATTERY						
ery Type Lead Acid				Lithium-lon		
Battery Size	(kWh)	11.5	15.4	9.0	14.0	
Homologation		N1	N1	N1	N1	
WEIGHTS						
GVM Gross Vehicle Weight	(kg)	2100	2100	2100	2100	
Kerb weight	(kg)	1274	1348	1003	1047	
Payload capacity	(kg)	826	752	1097 1053		
Gross payload capacity (includes 75kg allowance for operator)	(kg)	751	677	1022 978		
Volume	(m³)	3	3	3 3		
Maximum weight of the combination (GCW)	(kg)	3500	3500	3500	3500	
Tow load capacity - Braked (For road use) 1	(kg)	1400	1400	1400	1400	
Tow load capacity - unbraked (For road use) ¹	(kg)	637	674	502	524	
BATTERIES AND CHARGER						
Battery voltage / nominal capacity	(v) / (a)	48 / 240	48 / 320	48 / 190	48 / 290	
Recharge time	(hours mins)	8h 30	9h 45	4h 15 6h 30		
Charger	(v) / (a)	48 / 30	48 / 60	48 ,	/ 60	
Supply		240v singl	le phase	240v sing	gle phase	
Current draw	(a)	12	2	12		
Auxiliary battery	(v) / (a)	12 /	45	12 / 45		
PERFORMANCE						
Max peak power / Nominal power (S2-30 minutes)	(kW)	16.3 /	[/] 10	16.3 / 10		
Torque @ max peak power / Max torque @ 0 rpm	(Nm)	76 /	81	76 / 81		
Range (according to WLTP cycle) ²	(miles)	51	57	62	101	
Two factory speed settings: High speed / Low speed	(mph)	31 /	6.5	31 /	6.5	
Maximum gradient: Unladen / Laden / with trailer	(%)	30 / 15	5 / 12	30 / 15 / 12		
Approach angle	(°)	20)	20		
External turning: radius wall to wall / kerb to kerb	(mm)	4383 /	3900	4383 / 3900		
Noise moving (R (EU) 51)	dB(A)	63.	7	63.7		

¹Tow hitch available as an optional extra

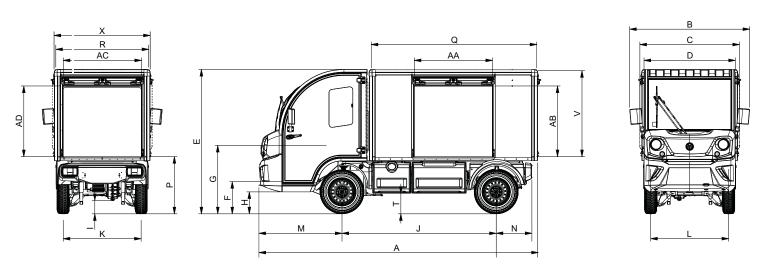

DIMENSIONS																								
Α	В	С	D	Е	F	G	Н	- 1	J	K	L	М	N	P ¹	Q	R	Т	U	V	Χ	AA	AB	AC	AD
3675	1574	1305	1200	1893	423	897	288	175	2022	1045	1045	1089	468	750	2170	1218	282	564	1126	1305	1375	926	1025	926

	MODEL	G4-06
Z	100% electric light commercial road vehicle	•
CONFIGURATION	Road homologated	N1
FIGUI	Power unit: 48 volt AC controller	•
CON	Rear drive axle with limited slip differential	•
	11.5 kWh 48v 240Ah lead acid battery	0
ES	15.4 kWh 48v 320Ah lead acid battery	0
SSOR	9.0 kWh 48v 190Ah lithium ion battery	0
ACCE	14.0 kWh 48v 300Ah lithium ion battery	0
ES &	Auxiliary 45Ah battery to run 12 volt system. Battery charged during operation via DC/DC converter	•
BATTERIES & ACCESSORIES	Auxiliary battery upgrade includes 12 volt connecting plug / socket to power additional auxiliary equipment 60Ah battery in place of standard Ah auxiliary battery Additional 48v - 12v 300W DC/DC converter to charge upgraded battery during operation	0
S	Dual circuit hydraulic brake system	•
BRAKING SYSTEMS	Front: disk brakes	•
IG SY!	Rear: drum brakes	•
ZAKIN	Electronic regenerative braking under deceleration with proportioning electric braking system	•
B	Hand operated park brake with torque limiting sensor	•
ව	Front-wheels: McPherson with helical springs and hydraulic shock absorber	•
SUSPENSION & STEERING	Rear-wheels: McPherson with helical springs and hydraulic shock absorber	•
& STE	Rack and pinion steering	•
NOIS	Power assisted steering	•
SPEN	Right hand drive	•
SU	Left hand drive	0
& IES	Full road lighting in accordance with N1 homologation Headlights, side, rear & brake lights, indicators, hazard warning lights, reverse light, rear fog light, LED daytime running lights	•
IGHTING &	Amber flashing beacon mounted on cab	•
LIGH	LED random flashing amber warning lights	0
	Rear mounted 12 volt working light	0
	High / low speed switch, 2 factory set speed settings between 6.5 and 31mph	•
	Safety seat cut out. Vehicle will not operate unless driver is seated	•
& IINGS	Emergency isolator	•
ROLS	Horn	•
CONTROLS & AUDIBLE WARNINGS	Automatic audible warning in reverse	•
AUD	Forward audible warning via dash mounted switch (bell)	0
	Automatic audible warning in forward (white noise)	0
	Progressive audible warning system in forward AVAS Acoustic Vehicle Alerting System compliment to UNECE R138	•
	High-definition LCD colour display	•
	Battery discharge indicator	•
RES	Digital speedometer	•
EQUIPMENT & FEATURES	Odometer	•
7 & F	Low level warning lights	•
MEN	Dash mounted lamp to indicate when park brake is applied	•
EQUIP	12 volt auxiliary socket	•
EC	Ignition key and steering lock	•
	2 stage deep discharge protection Traction battery low level indicator Automatic low speed cutback to prevent over discharge	•

	MODEL	G4-06
	Tubeless radial 155R13C 90N	•
TYRES	Anti puncture treatment	0
	Spare wheel (155R13C 90C) c/w jack & brace	0
	Winter tyres 155/80R13 79Q	0
	Michelin tyre pressure management system	0
ТОМ	50mm ball with 7 pin socket	•
	Combined 25mm pin single jaw tow hitch & 50mm ball with 7 pin socket	0
	Polypropylene bumpers	•
	Rear cab window	•
	Central locking	•
	Sliding door windows	•
	ABS glass front and rear screens	•
	Electric front wiper and screen wash	•
	Electric heated front windscreen	•
	Electric heater (700 watt)	•
CAB	Diesel heater	0
	Electric heated drivers seat	0
	Interior and exterior mirrors	•
	Interior light	•
	Glove compartment	•
	MP3 radio with Bluetooth connectivity	•
	USB socket	0
	Rear mounted camera with display screen	0
	Cab storage set to include bottle holder and central storage tray	0
වු	Adjustable driver and passenger seats	•
SEATING	Padded adjustable headrests	•
0,	Three-point inertia seat belts	•
	Box Van 2.44m³ body	•
	Aluminium frame, dry freight panels with anti-slip floor	•
<u>≻</u>	Lockable shutter door to nearside only with automatic LED interior light	•
ВОДУ	Offside shutter door in addition to standard nearside shutter door	0
	Rear shutter door in addition to standard nearside shutter door to nearside only with automatic LED interior light	0
	Hydraulic tipping body, complete with aluminium deck (Reduces payload capacity by 49kg)	0
ည္ဟ	1kg dry powder fire extinguisher	0
MISC	Road registered for category N1	0
	Chassis: Black, S345 steel, cataphoresis coated, robot welded, powder coating and gap sealing	•
	Cab roof and bonnet: White	•
COLOUR	Custom colour. Chassis black. Cab roof and bonnet to customer's single colour specification. RAL number to be supplied at time of order	0
700	Custom colour. Chassis black. Vinyl wrap cab roof and bonnet to customer's specification	0
	Highway maintenance chevron board	0
	Class 2 hi-visibility reflective band kit	0



BRADSHAW ELECTRIC VEHICLES

New Lane

Stibbington

Peterborough

PE8 6LW

enquiries@bradshawev.com www.bradshawEV.com 01780 782 621 All data and specifications are in accordance with information available at the time of publication and are subject to change without notice.

Some of the vehicles shown may be fitted with optional equipment or accessories that are available at extra cost.

This brochure supersedes all previous publications. Issue: April 2022

